

CELO



2 nails
Per
second

3.8 Kg
Light
tool

8.000
Fixings per
charge

FOX GAS NAILER

www.celofixings.com

Gas nailer FOX

The most efficient gas nailer
for drywall construction



Gas nailer FOX

Advantages, approvals and certificates

- 


2 nails
Per second
- 

3.8 Kg
Light tool
- 

8,000
Fixings per charge



Suitable building materials



Designed for use it in different base materials such as concrete, steel, solid bricks and to a limited extend wood. Can be used on floors, walls, and ceilings.

Applications



Drywall construction
Fastening of drywall profiles.



Light- duty construction applications
For fixing drainage foils on walls.



Installations
For fixing conduits, cables and pipes on floors.

Technical data of gas nailer FOX

Characteristics	Technical data
Height	385 mm
Width	130 mm
Length	327 mm
Weight	3.8 Kg (battery included)
Loading capacity	FOX 20: 20 + 2 nails* FOX 40: 40 + 2 nails*
Type of battery	Li-Ion-battery (battery lasts for 8000 nails)
Capacity of battery	2.500 mAh
Connection charger	100-240V AC. (50 or 60Hz)
Charging time	90 min for full charge
Temperature range for use	0°C to 50°C

* There must be at least 2 nails in the magazine, otherwise the nailer cannot be triggered.

Main features / Advantages



85 Joule power
ensure good quality setting results



Gas power
2 nails per second; high setting frequency



Highly effective dust protection
Clever filter systems at the suction and discharge openings



Fast recharge
A 2 minutes charge allows you to set at least another 200 nails



Ergonomic handle
relieves the hand during longer use



Demountable tool nose
for quick removal of jammed nail residues



Simple and fast depth adjustment
to adapt to various applications



Fast clearance of jammed nails
Quick release system



Laterally adjustable belt hook
for the right and left handed



Battery indicator
prevents a standstill at the construction site



Li-Ion battery
Up to 8.000 fastenings per charge



Versatile
Nails from 13 to 40 mm length for many different base materials



Set includes

- 1 x Gas nailer FOX
- 1 x Safety goggles
- 2 x Ear plugs
- 2 x Battery Li-Ion
- 1 x Charger
- 1 x Carrying case
- 1 x Instruction manual
- 1 x Allen wrench 4
- 1 x Allen wrench 5



Gas nailer FOX

Type	Art-No	[Set]	[pcs]
FOX with magazine for 20 nails	FOX20	1	-
FOX with magazine for 40 nails	FOX40	1	-



Battery and charger for gas nailer FOX

Type	Art-No	[pcs]	[pcs]
FOX Battery	FOXBAT	1	-
FOX Charger	FOXCARSET	1	-




High-performance gas for gas nailer FOX

Type	Art-No	Height [mm]	Content [ml]	[pcs]	[pcs]
Fuel cell*	91GASA	180	80	1	20

* sufficient for min. 1.000 nails



Steel nails FOX XHA & TKA

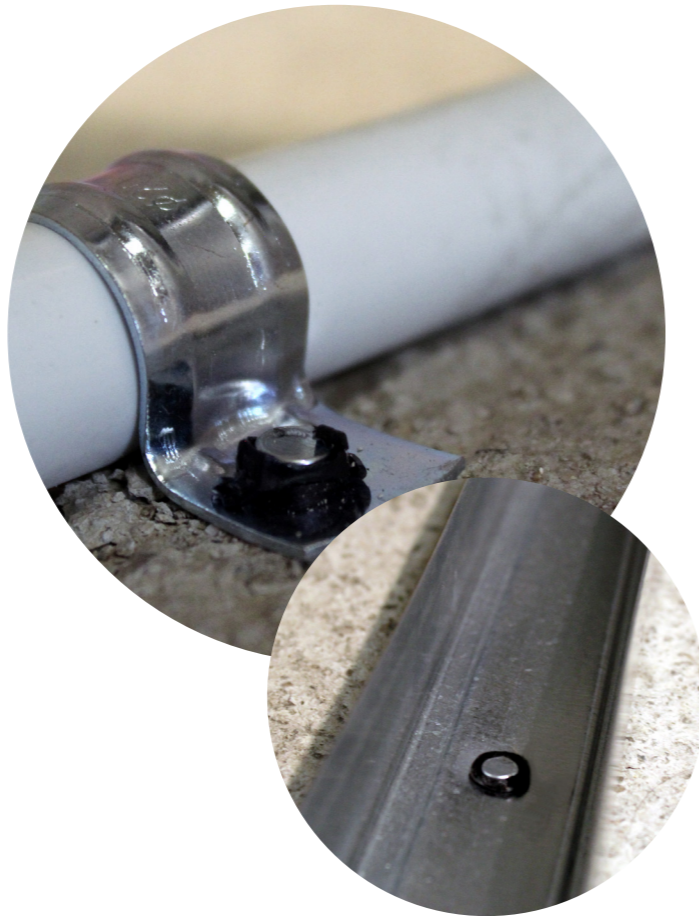

Advantages




XHA premium nails for gas nailer FOX



TKA standard nails for gas nailer FOX

- XHA:
 - Premium nails; suitable for hard concrete and steel
 - Grooved nails to improve grip
- TKA:
 - standard nails for concrete and solid bricks
 - Nail 15 mm especially hardened for for hard concrete and steel
- Each box includes one high-performance fuel cell, sufficient for 1.000 nails

Mounting

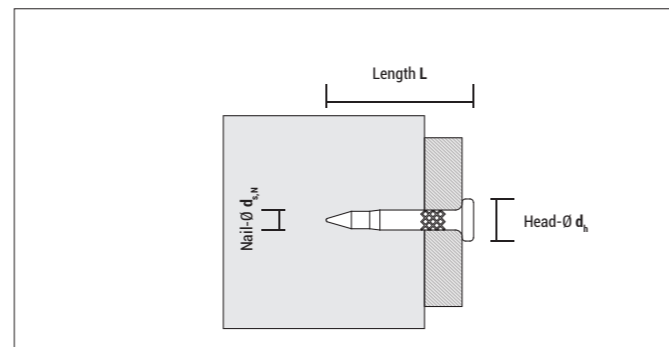

Approvals and certificates



XHA premium nails for FOX

Type	Art-No	Nail-Ø d _{s,N} [mm]	Length L [mm]	Head-Ø d _h [mm]	[pcs]	[pcs]
XHA premium nails 13 mm + fuel cell	9131000XHA	3	13	6,3	1.000	5.000
XHA premium nails 17 mm + fuel cell	9171000XHA	3	17	6,3	1.000	5.000
XHA premium nails 22 mm + fuel cell	9221000XHA	3	22	6,3	1.000	5.000
XHA premium nails 27 mm + fuel cell	9271000XHA	3	27	6,3	1.000	5.000
XHA premium nails 32 mm + fuel cell	9321000XHA	3	32	6,3	1.000	5.000
XHA premium nails 38 mm + fuel cell	9381000XHA	3	38	6,3	1.000	5.000

+ each box includes one high-performance fuel cell



Steel nails FOX



TKA standard nails for FOX

Type	Art-No	Nail-Ø d _{s,N} [mm]	Length L [mm]	Head-Ø d _h [mm]	[pcs]	[pcs]
TKA nails 15 mm + fuel cell	9151000TKA	2,6	15	6,3	1.000	5.000
TKA nails 19 mm + fuel cell	9191000TKA	2,6	19	6,3	1.000	5.000
TKA nails 25 mm + fuel cell	9251000TKA	2,6	25	6,3	1.000	5.000
TKA nails 30 mm + fuel cell	9301000TKA	2,6	30	6,3	1.000	5.000
TKA nails 40 mm + fuel cell	9401000TKA	2,6	40	6,3	1.000	5.000

+ each box includes one high-performance fuel cell



Overview - Suitable building materials for XHA and TKA FOX

	XHA 13 mm	TKA 15 mm	XHA 17 mm	TKA 19 mm	XHA 22 mm	TKA 25 mm	XHA 27 mm	TKA 30 mm	XHA 32 mm	XHA 38 mm	TKA 40 mm
Steel	●	●									
Concrete > C20/25		●	●	○	○						
Concrete C20/25			○	●	●	●	○				
Solid brick			○	●	●	●	●	●	○	○	○
Hollow brick						●	●	●	●		
Wood										●	●

● very suitable ○ suitable to a limited extent

Magnetic holder for gas nailer FOX

FOXMH



Advantages



- Magnetic holder for FOX gas nailer- easy to attach to the nose of the tool
- Time and money saving as any kind of thin steel metal discs can be used with the magnetic holder
- Typical applications:
 - fixing expanded metal mesh to steel beams
 - fixing of any kind of foil, fleece or mesh



FOXMH

Type	Art-No	Height H [mm]	Outer-Ø [mm]	Inner-Ø [mm]	[pcs]	[pcs]
FOXMH	FOXMH	9,5	23,5	11,5	1	-


Compatibility CELO gas nailer accessories with different gas nailers

CELO Accessories	CELO		SPIT		HILTI		DEWALT		WÜRTH	RAWL PLUG	FISCHER
	FORCE ONE	FOX	PULSA 800 P	PULSA 800 E	BX-3	GX-3	DCN890	TRAK IT® C5	DIGA CS2	SC40II	FGC 100
XHA	✓	✓	✓	✓	X	X	X	X	X	✓	✓
TKA	✓	✓	✓	✓	X	X	X	X	X	✓	✓
GASFONE	✓	X	X	X	X	X	X	X	X	X	X
GASA FOX	X	✓	X	X	X	X	X	X	X	X	✓
ABT	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
UT	✓	✓	✓	✓	X	X	X	X	X	✓	✓
TPC/TPLC	✓	✓	X	✓	X	X	X	X	X	✓	✓
WSC	✓	✓	X	✓	X	X	X	X	X	✓	✓
WDC	✓	✓	X	✓	X	X	X	X	X	✓	✓
TBB	✓	✓	✓	✓	X	X	X	X	X	✓	✓
NTBB grey	X	X	X	✓	✓	✓	✓	✓	✓	X	X
TBL	✓	✓	✓	✓	X	X	X	X	X	✓	✓
TBD	✓	✓	X	✓	X	X	X	X	X	✓	✓
TBM	✓	✓	X	✓	X	X	X	X	X	✓	✓
TBT	✓	✓	✓	✓	✓	✓	X	X	X	✓	✓
FP	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
FPD	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
FT	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CHS	✓	✓	✓	✓	✓	✓	X	X	X	✓	✓
PFT	✓	✓	✓	✓	✓	✓	X	X	X	✓	✓
DFT	✓	✓	✓	✓	✓	✓	X	X	X	✓	✓
ATR M6	✓	✓	X	✓	X	X	X	X	X	✓	✓
ATR M8	✓	✓	X	✓	X	X	X	X	X	✓	✓
ATV	✓	✓	X	✓	X	X	X	X	X	✓	✓
ATVS 8	✓	✓	X	✓	X	X	X	X	X	✓	✓
AAT	✓	✓	X	✓	X	X	X	X	X	✓	✓
AW	✓	✓	X	✓	X	X	X	X	X	✓	✓
AP	✓	✓	✓	✓	✓	✓	X	X	X	✓	✓
TXS	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Accessories

FOX

More accessories on our website at www.celofixings.com or on request

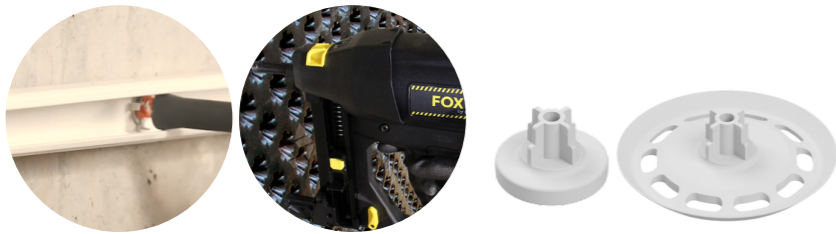

Plastic washer AP

Type	Art-No.	Diameter Ø [mm]	Height H [mm]	[pcs]	[pcs]
AP 16	916AP	16	3	100	-
AP 30	930AP	35,5	2,75	100	-



Textile stripe TXS black

Type	Art-No.	Height H [mm]	Length L [mm]	Width W [mm]	[pcs]	[pcs]
TXS black	9419TXS	1,25	10.000	19	8	-



Punched metal tape Cintapolo CA

Type	Art-No	Width W [mm]	Clearance hole-Ø d _i [mm]	Distance of holes S [mm]	Tensional strength ≤ [kg]	[pcs]	[pcs]
Cintapolo 12	12CA	12	5,1	14	50	10	-
Cintapolo 17	CA	17	7	20	95	10	-





CELO Befestigungssysteme GmbH
Industriestraße 6
D-86551 Aichach
www.celofixings.com
Hotline: +49 (0) 8251-90485-0
Telefax: +49 (0) 8251-90485-49
E-mail: info@celofixings.de

Small Things Matter

Presented by: